
PARS Chandelier

Ø70 & Ø100

Installation Manual

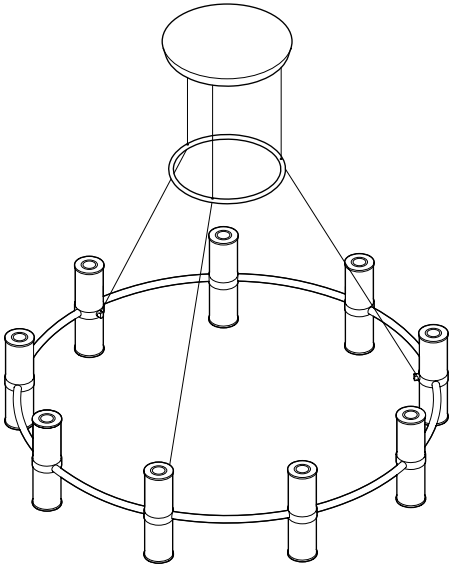

ANOUR

ANOUR - Valhøjs Allé 180, 2610 Rødovre - Denmark - Corp.reg.no.: DK 44167999
Phone: +45 33 60 70 70 - Mail: contact@anour.dk - Web: www.anour.dk

ANOUR

PARS
CHANDELIER
Ø70 & Ø100

Installation manual

Please, read our instructions before installing and using the product.
Unpack the lamp upon receiving it. If you keep the lamp in the original packing for a prolonged period, the lamp surface might be affected. If you have any problems with the electrical installation, contact an electrician. Be sure to turn off the power before you start the installation. In some countries, all electrical installations must be carried out by professional electricians only. For further information, contact the relevant authorities.


Our products are for indoor use only. Check on a regular basis that the cord and other parts are not damaged. In this case, the product must not be used. Save these instructions for future use.


We use LED as a light source for our products. For replacement of the LED, contact Anour. The product should not be dismantled as it may get damaged. The product should not come into direct contact with water. We do not supply a power cable from the outlet to the power supply. The lamp must be connected to the wall switch. This wall switch should be used on a regular basis to ensure the proper functionality of the lamp and driver longevity.

Stone shades used for this lamp are handmade from natural stone. There are some variations in size, color and texture of the stone.


Our products are marked with the symbol of the crossed out wheelie bin. That means that the product should not be disposed of with other household waste. Our products must be recycled in accordance with local environmental regulations for the disposal of waste. In complying with this you will help to minimize any adverse effect on human and environmental health.

If you have any questions, please contact Anour at contact@anour.dk

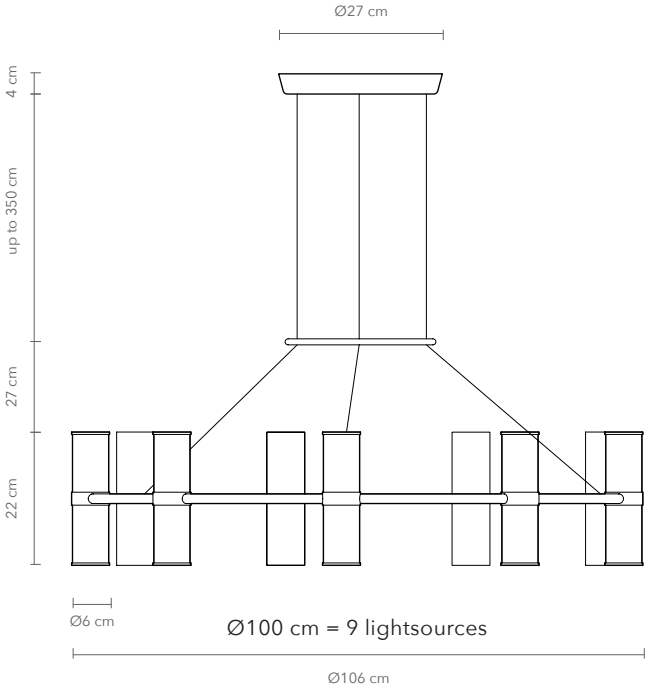

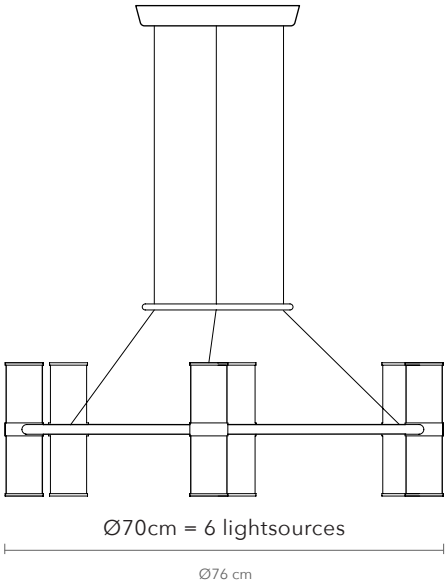


General dimensions

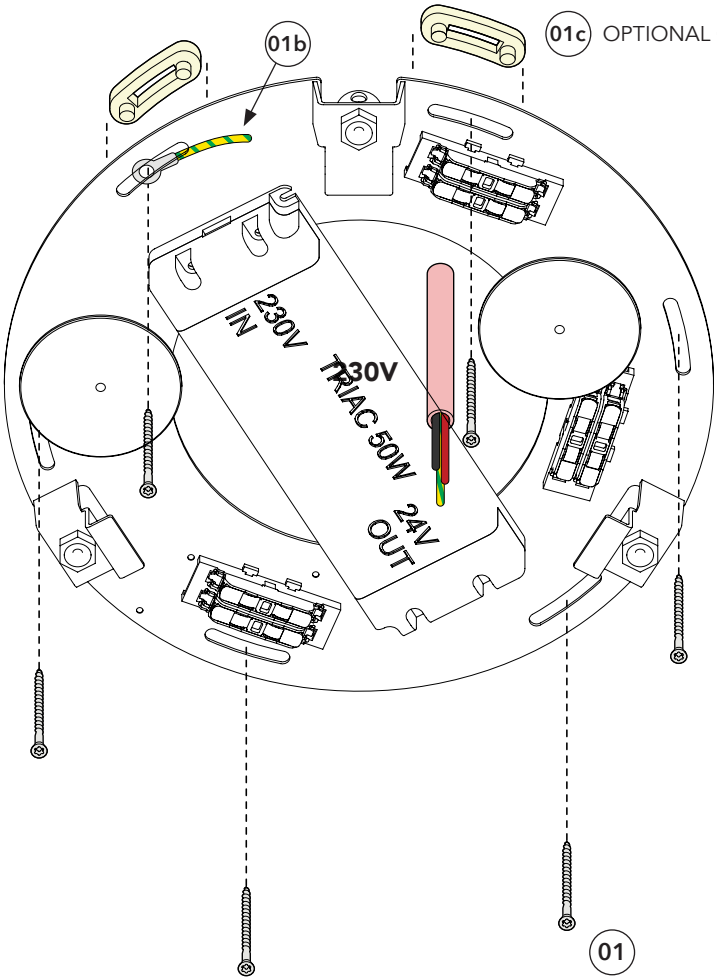

1. Install the ceiling rosette assembly with attached screws. If needed, use wall plugs.

1b. During the installation, fixate the grounding cord with one of the screws close to the 230V connection.


1c. optional - if you need to bring the 230V power from side of the lamp, use attached spacers while installing the ceiling rosette.

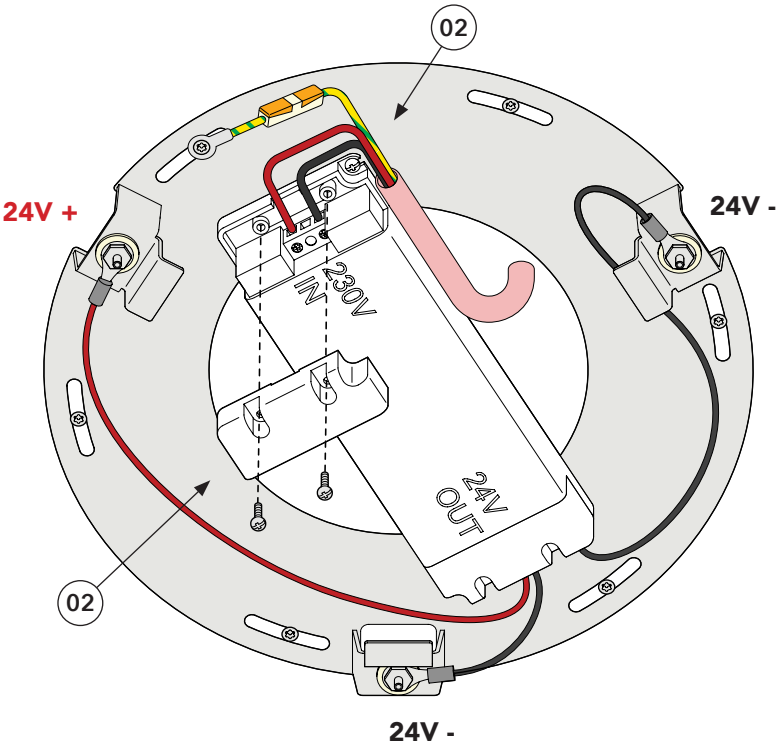

2. Connect the 230V cord to the driver and grounding cord.

3. Use the provided driver endcap to fixate the power cord.


Notice the location of 24V+ and 24V- positions.
24+ is marked with a red cord.

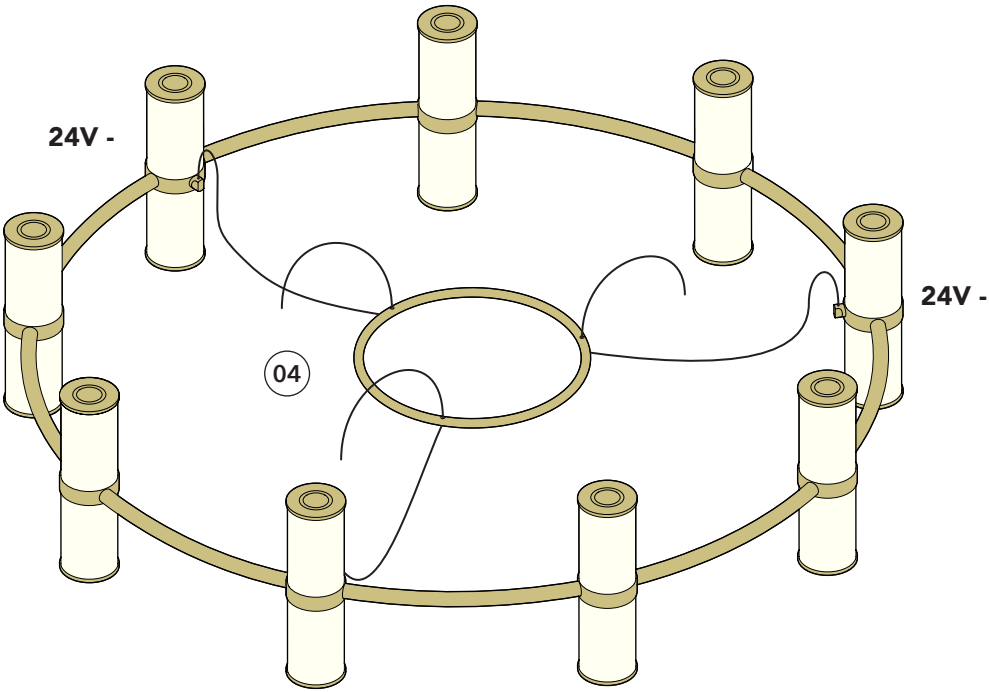

Handle the lamp with attached gloves to prevent the patination.

4. Note the location of 24V+ and 24V- on the lamp.
24V+ is marked with a sticker on the stone shade.


Place the chandelier with the connected middle ring under the installed rosette. Align the polarity of wires with the connection points on the rosette.

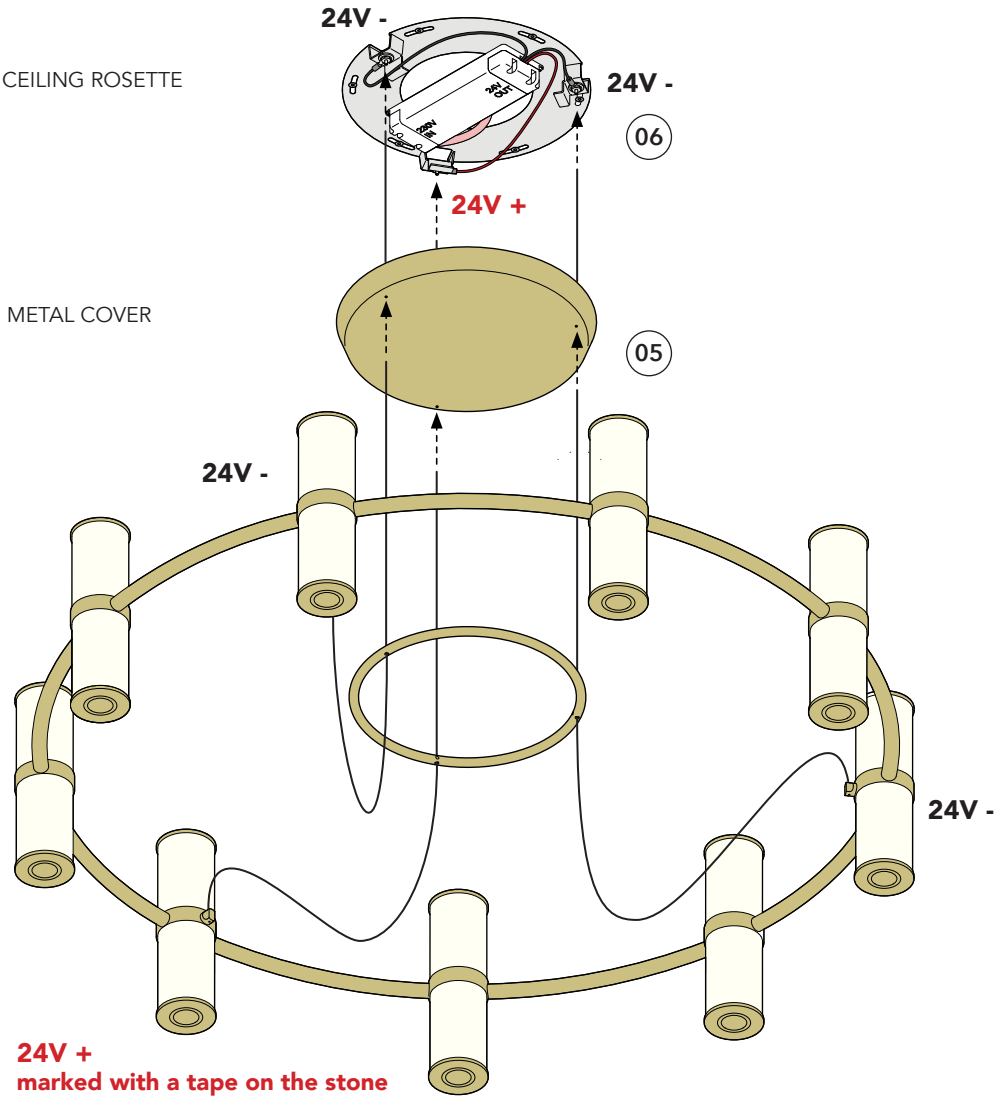


Handle the lamp with attached gloves to prevent the patination.


5. Pull the steel wires thru the metal cover and place the metal cover on top of the middle ring.

6. Continue pulling the wires into the wire grippers in the ceiling rosette. Mind the + and - poles.

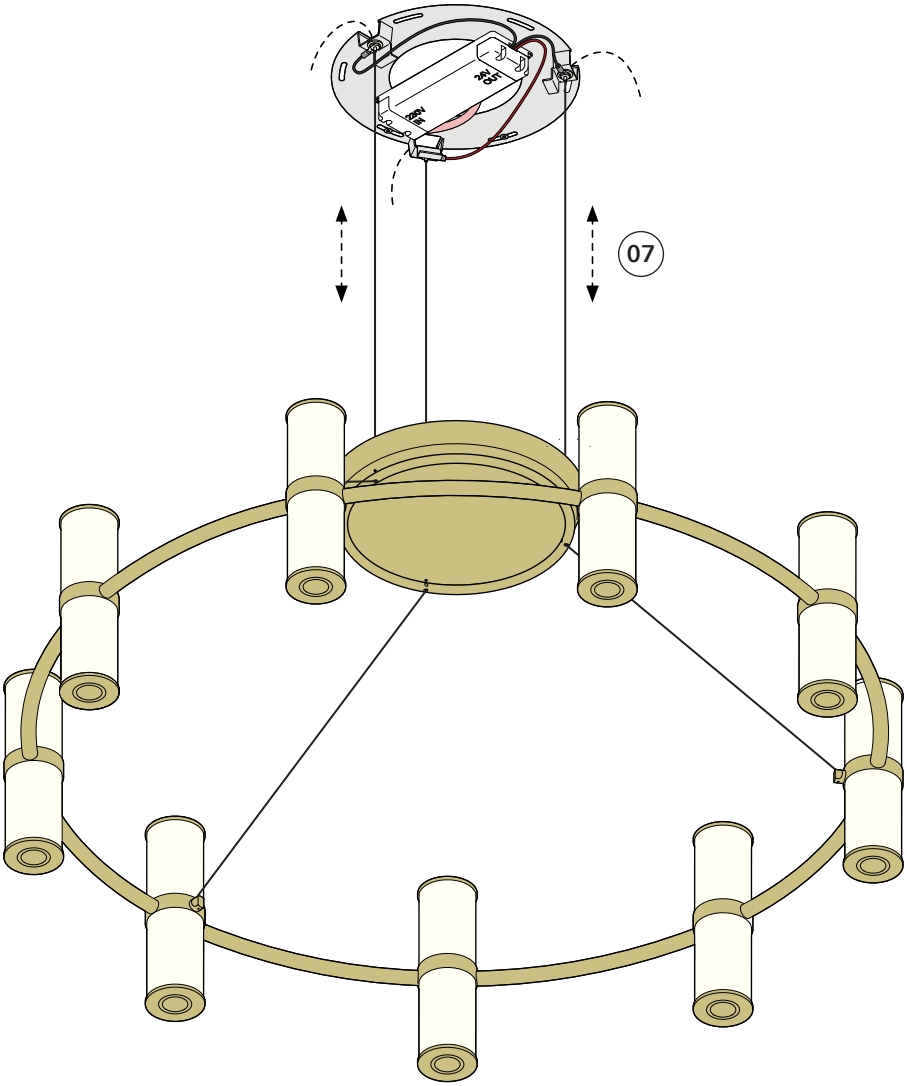

7. Adjust the position of the lamp.
You can release the wire by pushing the top cylinder of the wiregripper.

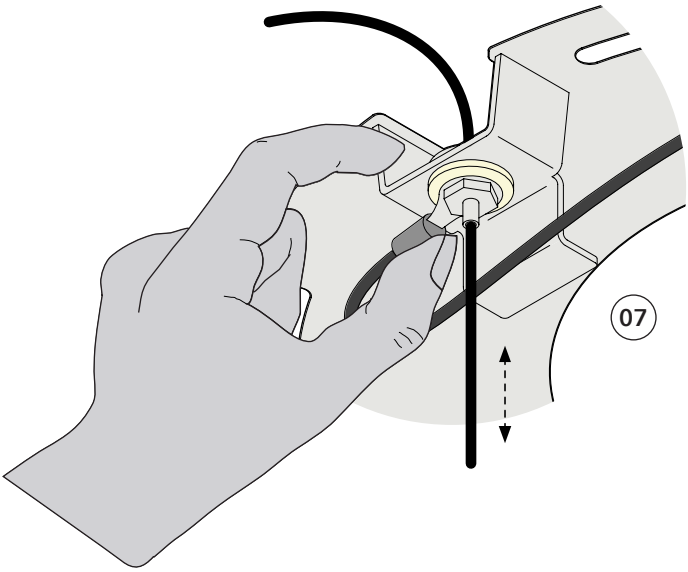


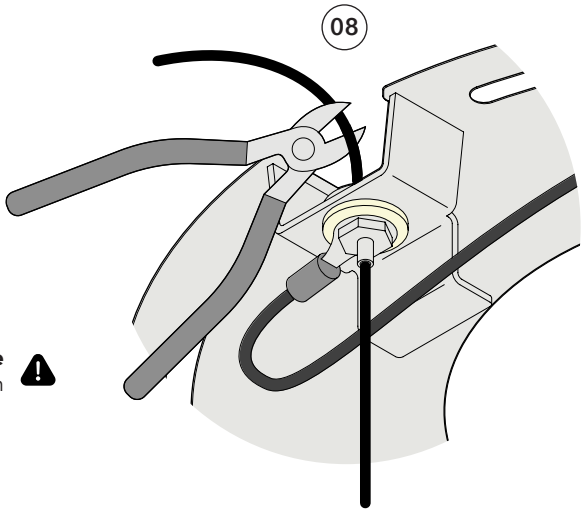

Cut the excess of wire
dont leave more than 1cm

10. Cut the excess wire as close as possible to the bracket.

Wire leftover cannot be touching any metal part of the bracket.

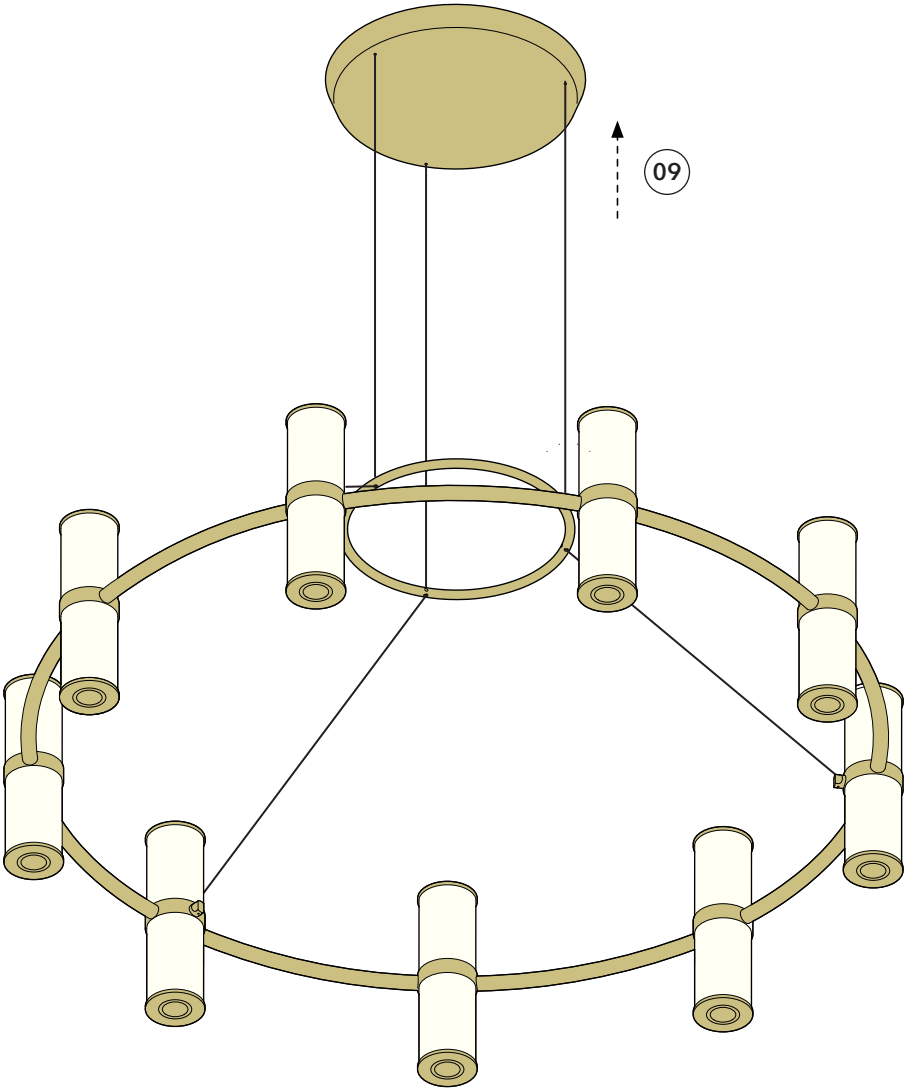

12. Close the ceiling rosette by sliding the metal cover up.
Hold the metal cover all the way up, quick release might damage the metal cover.

ANOUR

Thank you for choosing ANOUR lamp. Each piece is crafted to age with character and to quietly light your everyday rituals.

For questions, adjustments or spare parts, our team is ready to assist you at anour.dk or contact@anour.dk.