
PARS Horizontal

Installation Manual

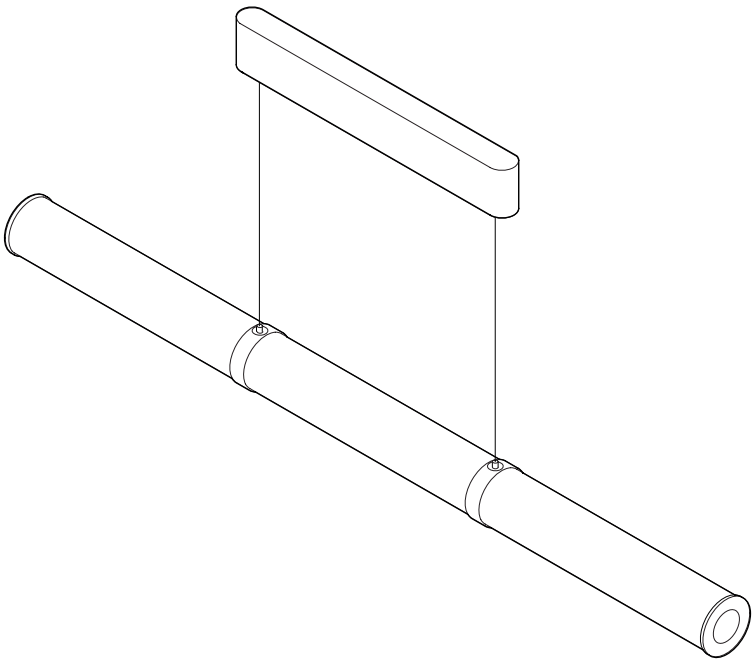

ANOUR

ANOUR - Valhøjs Allé 180, 2610 Rødovre - Denmark - Corp.reg.no.: DK 44167999
Phone: +45 33 60 70 70 - Mail: contact@anour.dk - Web: www.anour.dk

ANOUR

PARS
HORIZONTAL PENDANT

Installation manual

Please, read our instructions before installing and using the product.
Unpack the lamp upon receiving it. If you keep the lamp in the original packing for a prolonged period, the lamp surface might be affected. If you have any problems with the electrical installation, contact an electrician. Be sure to turn off the power before you start the installation. In some countries, all electrical installations must be carried out by professional electricians only. For further information, contact the relevant authorities.

Our products are for indoor use only. Check on a regular basis that the cord and other parts are not damaged. In this case, the product must not be used. Save these instructions for future use.

We use LED as a light source for our products. For replacement of the LED, contact Anour. The product should not be dismantled as it may get damaged. The product should not come into direct contact with water. We do not supply a power cable from the outlet to the power supply. The lamp must be connected to the wall switch. This wall switch should be used on a regular basis to ensure the proper functionality of the lamp and driver longevity.

Stone shades used for this lamp are handmade from natural stone. There are some variations in size.

Our products are marked with the symbol of the crossed out wheelie bin. That means that the product should not be disposed of with other household waste. Our products must be recycled in accordance with local environmental regulations for the disposal of waste. In complying with this you will help to minimize any adverse effect on human and environmental health.


If you have any questions, please contact Anour at contact@anour.dk

PARTS: (INCLUDED IN THE PACKAGE)




x1	**x1**	**x1**	**x1**	**x2**	**x2**	**x2**	**x2**	**x1**
Lamp Ø6 x 94 cm	Ceiling rosette (assembled) 36,5 x 3 x 6 cm	Ceiling cord spacer (optional) 36,5 x 3 x 0,5 cm	Pair of gloves	Wall screw Ø4,2 x 60mm	Wall plug Ø 5,5 x 32mm	Steel wire Ø1,2mm x 4m	Steel wire nipple Ø6 x 20mm	Allen key 2,5

Required tools: (not included)

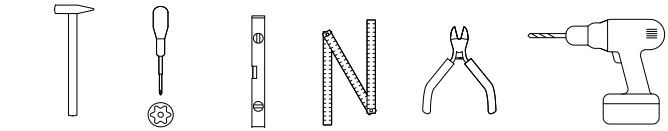


Hammer | Screwdriver **TX20** | Leveling tool | Measuring tool | Wire clippers | Drill, Drill bit Ø5,5 (6) mm

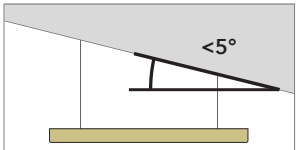


For sloped installation, the angle of the ceiling inclination must be less than 5 degrees.


If the ceiling is sloped more than that, please order **"Wiregripper for sloped ceilings"**.

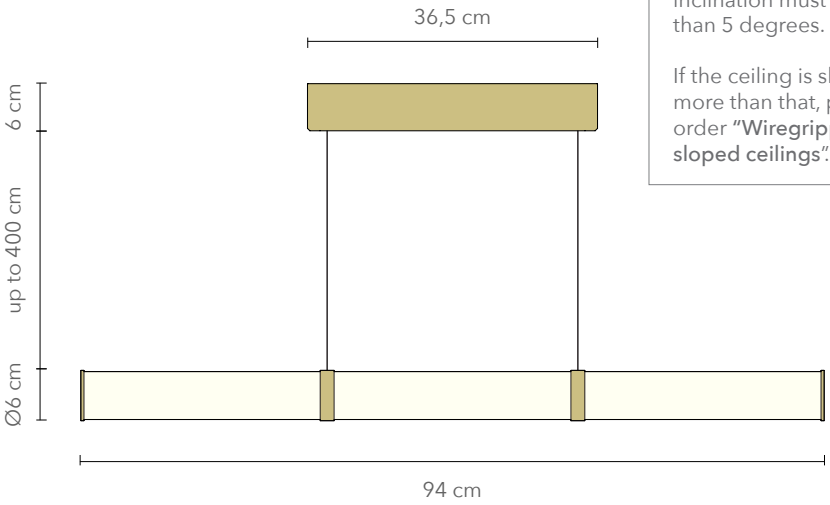

General dimensions




For dining table +/- 60 cm




For kitchen island +/- 70 cm

Recommended height installation

DIAGRAM TRIAC WITH EXTERNAL DIMMING

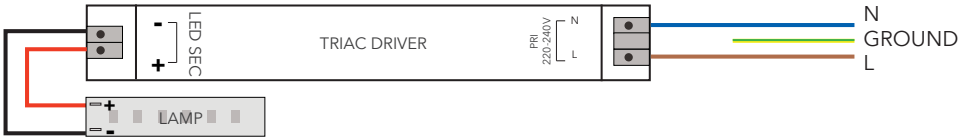

POSSIBLE DALI INSTALLATION

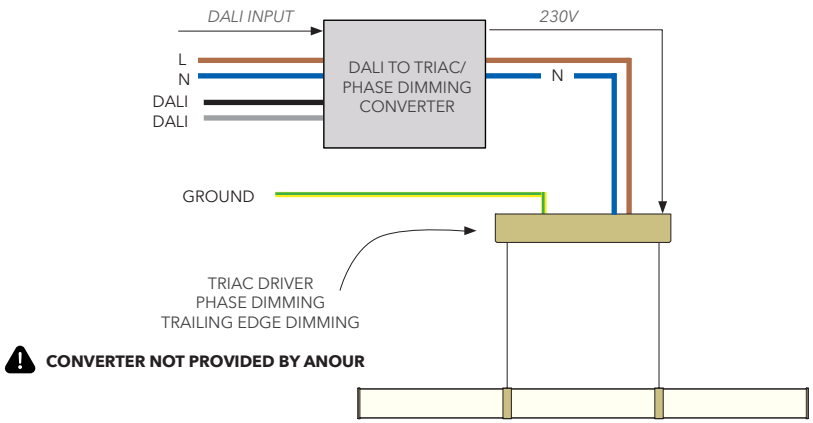

LAMP INSTALLATION MANUAL

Disassembly of the driver rosette

Use attached gloves while handling the lamp or driver rosette to prevent the patination.
1. Unscrew the 2x set screws using Allen key 2,5.


2. Remove the metal rosette cover.
Always use gloves while handling this part.


3. Unscrew 4x screws using a Torx8 tool.

4. Remove the driver assembly from the ceiling bracket.

5. Remove the driver endcap on the 230V side.

6. Remove the optional ceiling cord spacer.

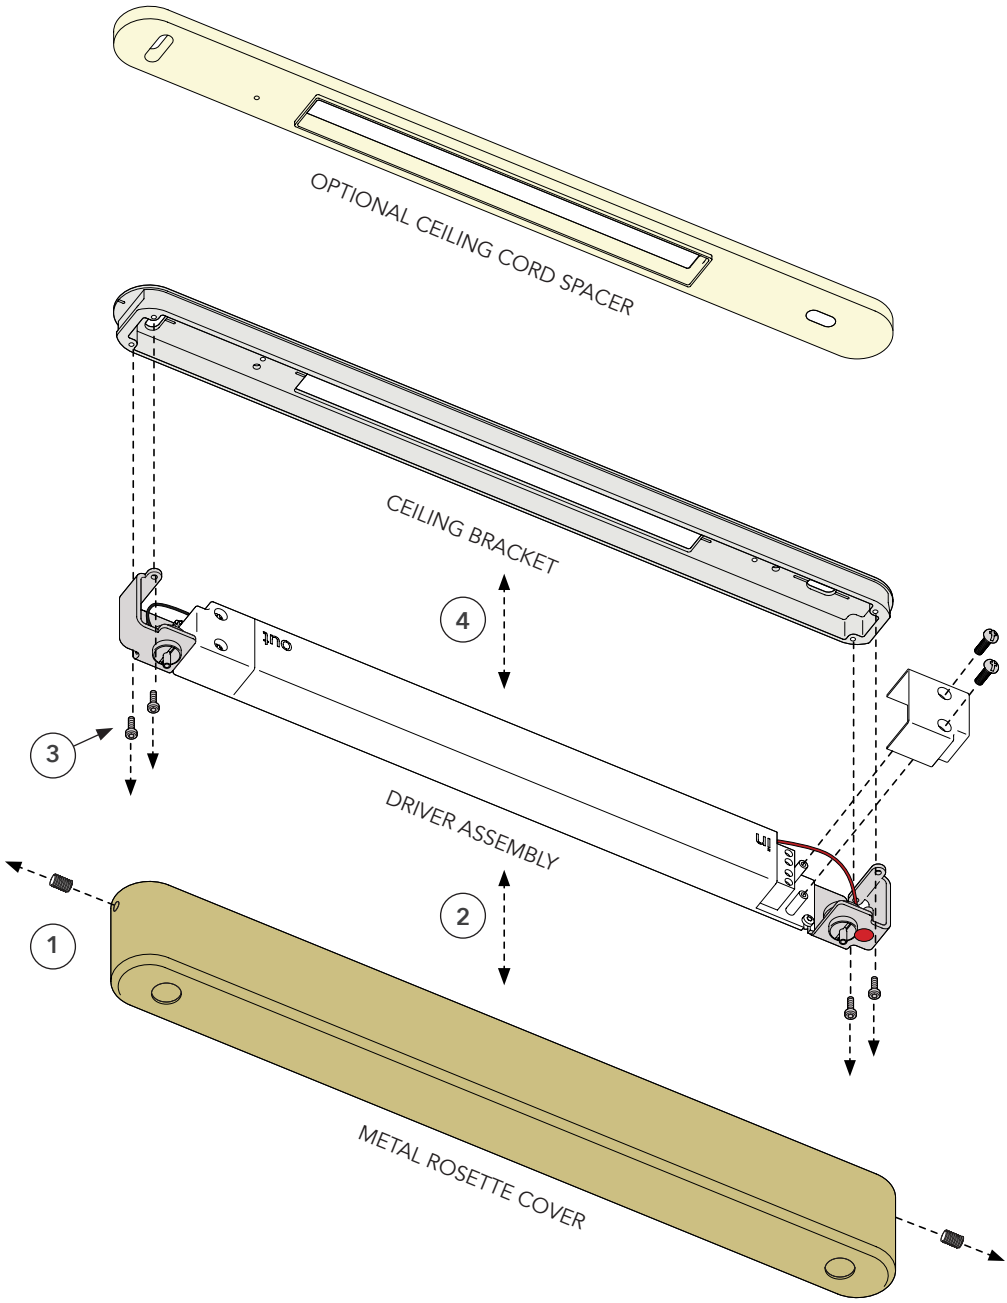
OPTIONAL CEILING CORD SPACER
CEILING BRACKET
4
3
DRIVER ASSEMBLY
2
1
METAL ROSETTE COVER

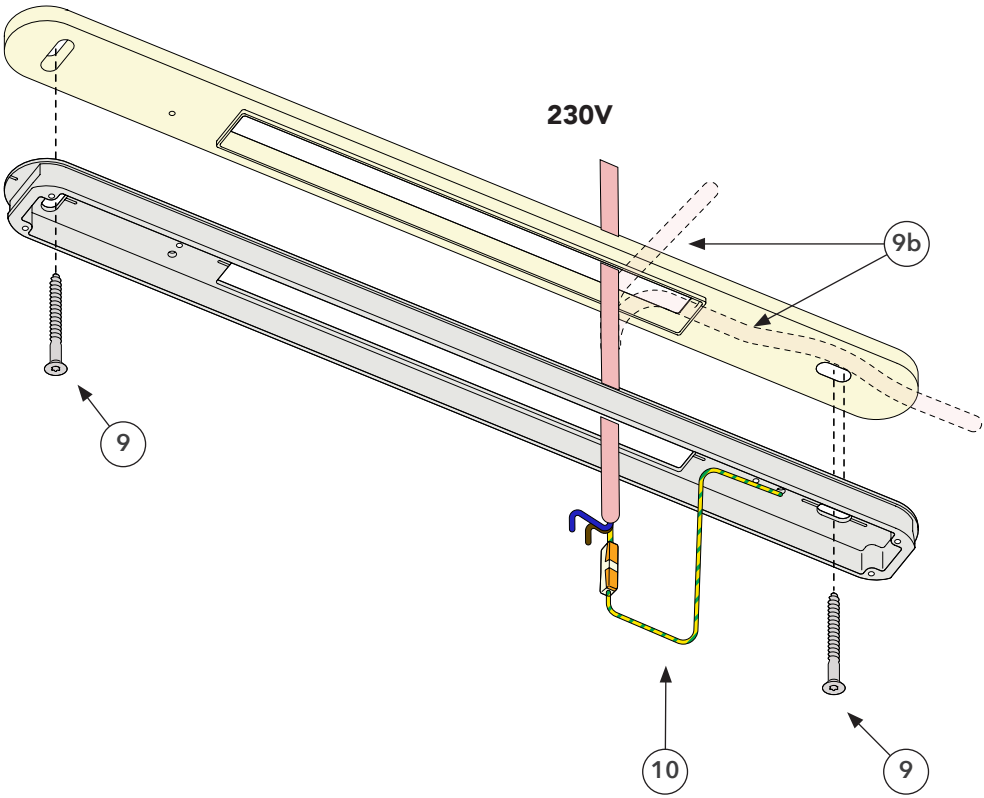

Installation of the driver rosette


7. Turn off the main power.

8. Measure the ceiling rosette position using the schematics on page 2.

9. Mount the ceiling bracket using 2x wall screws Ø4,2 x 60mm.
If required, use wall plugs.

9b Optional. If the 230V connection comes from a different location than directly under the rosette, use the ceiling cord spacer. You can cut the spacer to allow the connection from the side.

10. Connect the grounding cord with the attached Wago connector.

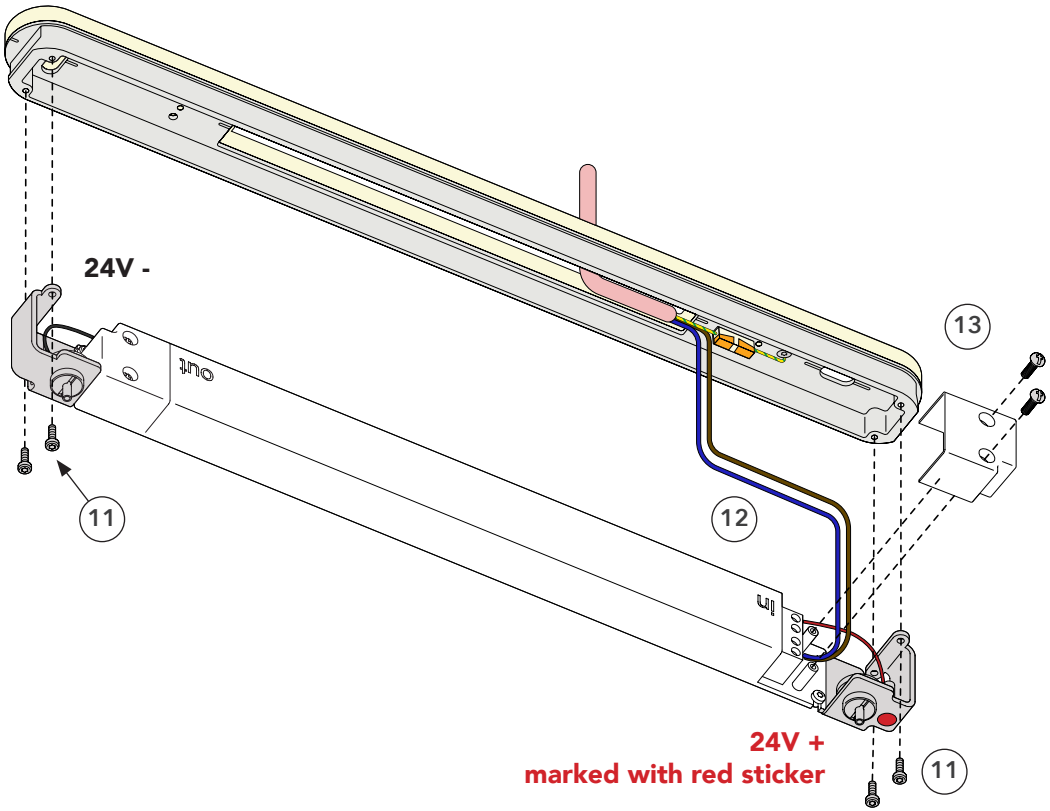


11. Attach the driver assembly to the ceiling bracket via 4x screws.
Use the provided Torx 8 tool and torque the screws by hand only.

12. Connect the 230V to the driver. We do not supply the cable from the outlet to the power supply.
Please see the wiring diagram on page 4.

13. Attach the driver endcap.


Notice the location of 24V+ and 24V- positions.
24+ is marked with a red sticker.

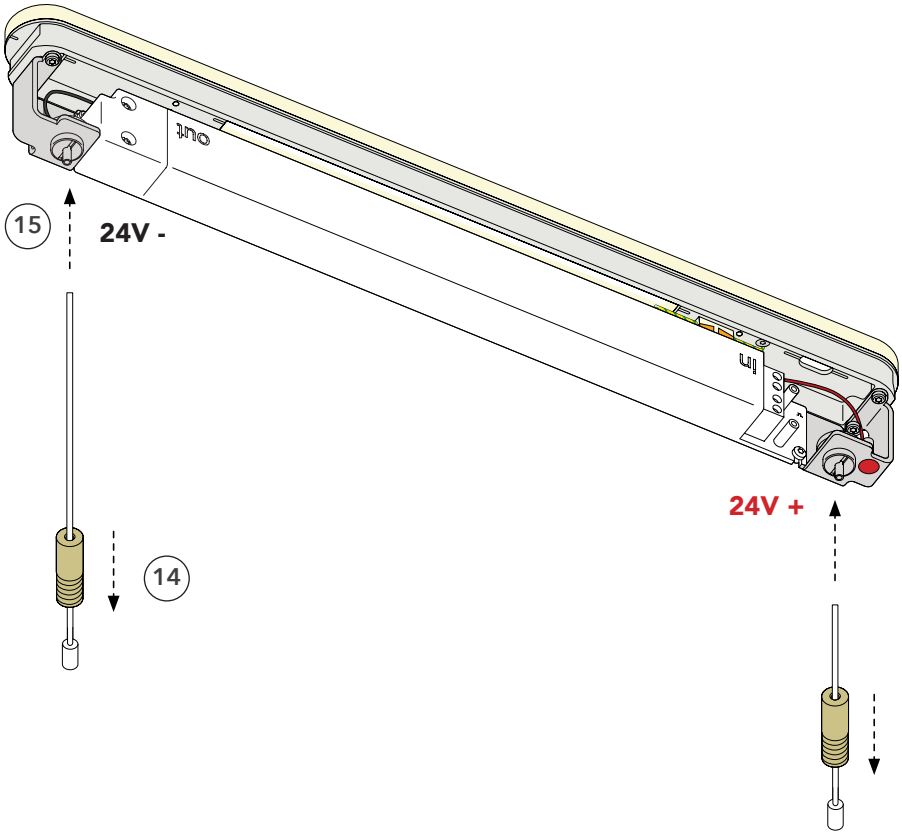

Preparation and hanging of the lamp

14. Connect both wires to the nipples as shown.


15. Insert both wires into the wire grippers.
Note the location of 24V+ and 24V- on the driver assembly.

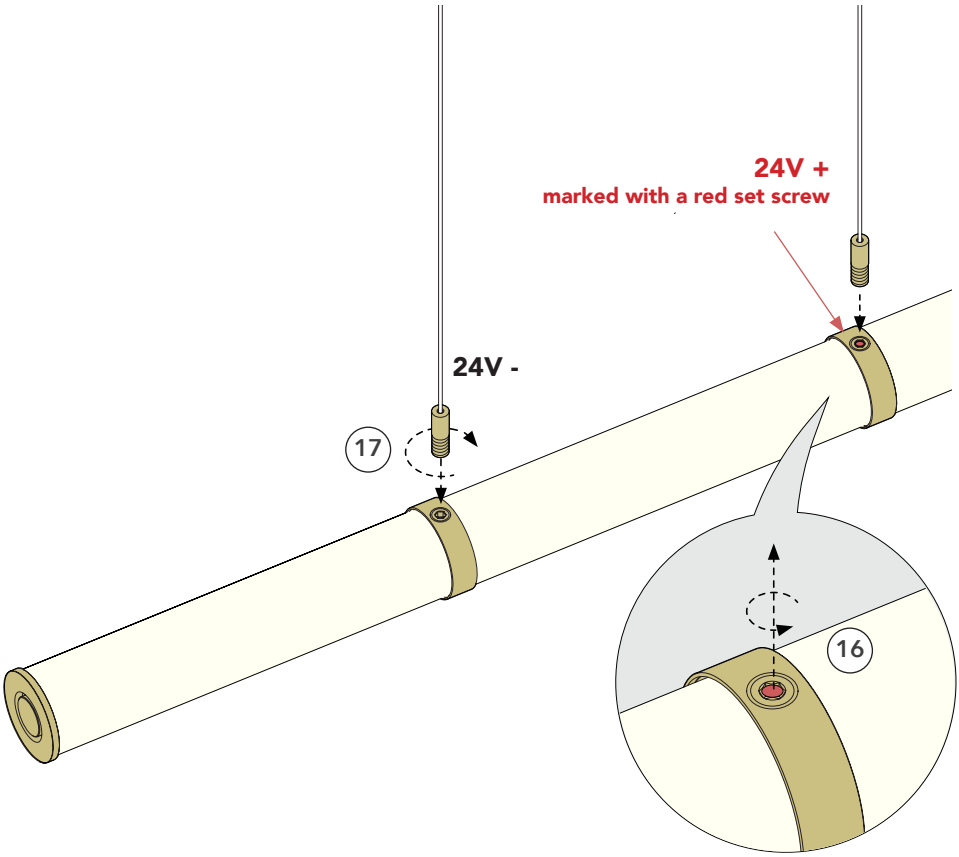

Handle the lamp with attached gloves to prevent the patination.

16. Note the location of 24V+ and 24V- on the lamp.
24V+ is marked with a red plastic set screw.
Remove the plastic set screw.


17. Connect both nipples with wires to the lamp.

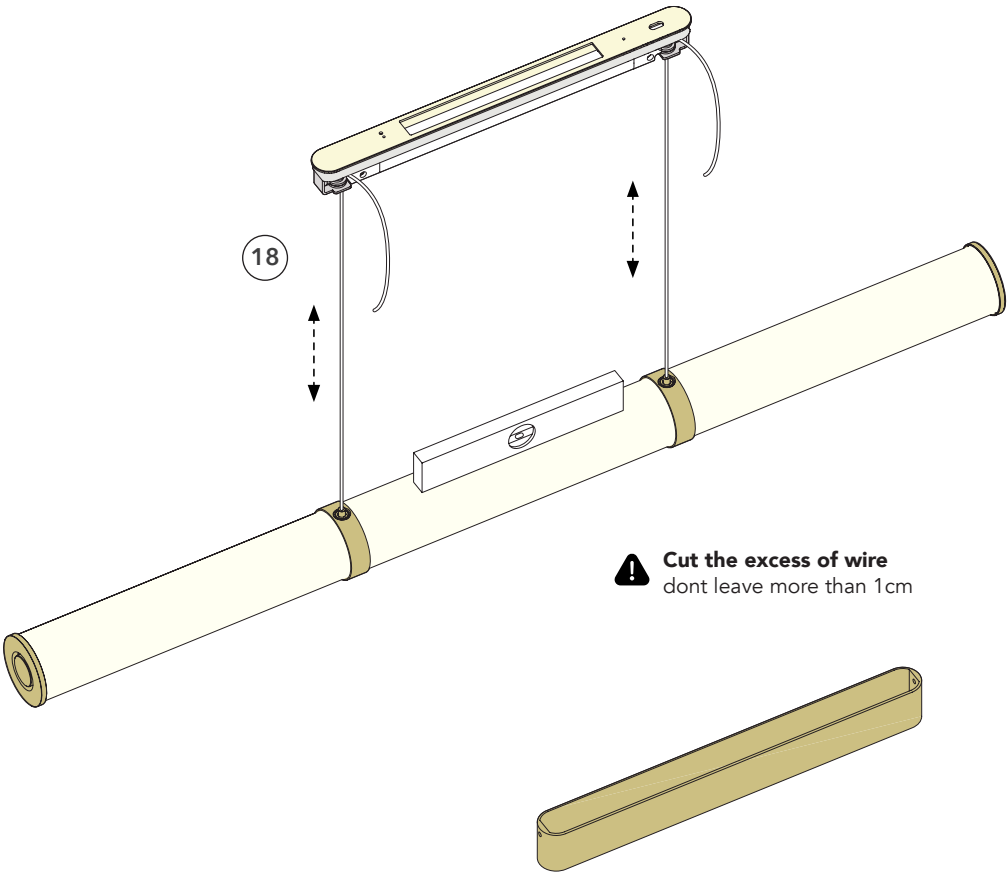

18. Set the correct lamp height by pushing the wire into the wire gripper.
You can release the wire by pressing the wire gripper.


For recommended height, please see schematics on page 3.

Metal rosette cover is not mounted at this stage.

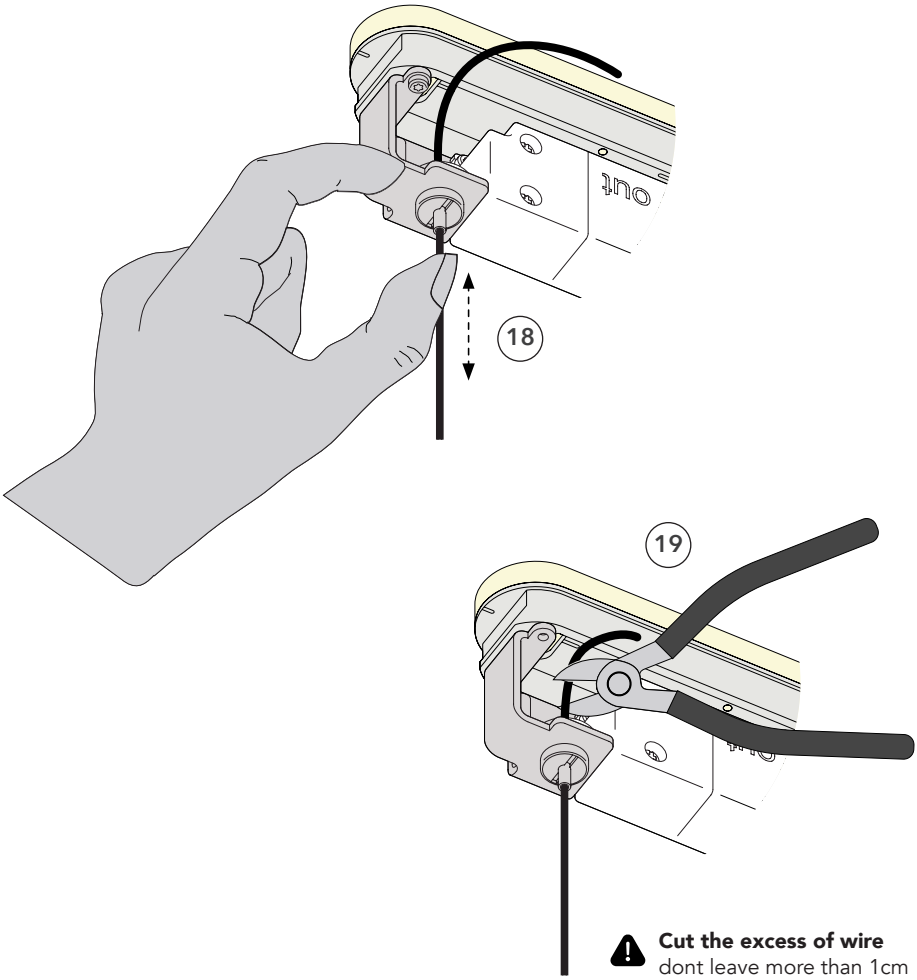

19. Cut the excess wire as close as possible to the bracket.


Wire leftover cannot be touching any metal part of the bracket.

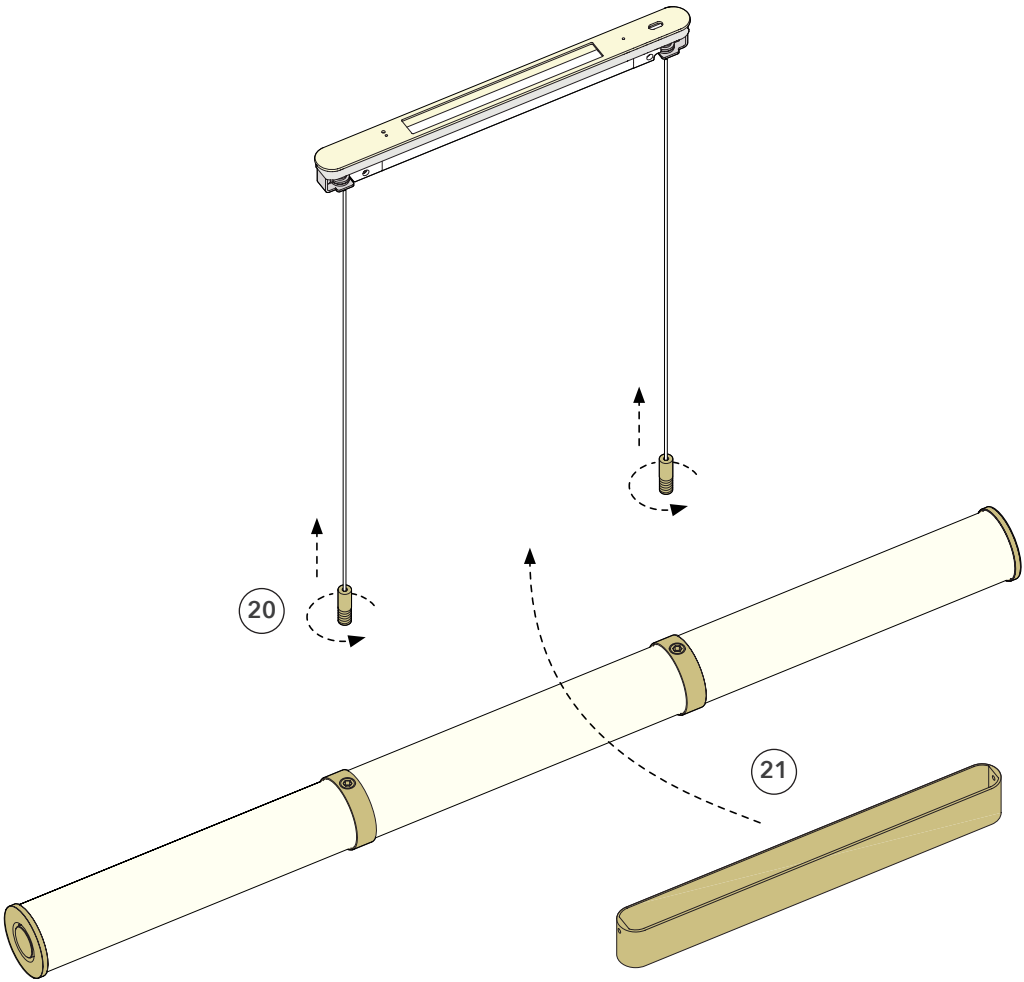

Installation of the ceiling rosette cover


20. After setting up the desired wire length, unscrew both nipples off the luminaire and set the lamp aside. Remember the location of 24V+ and 24V- on the lamp.

21. Slide the metal rosette cover on both wires.

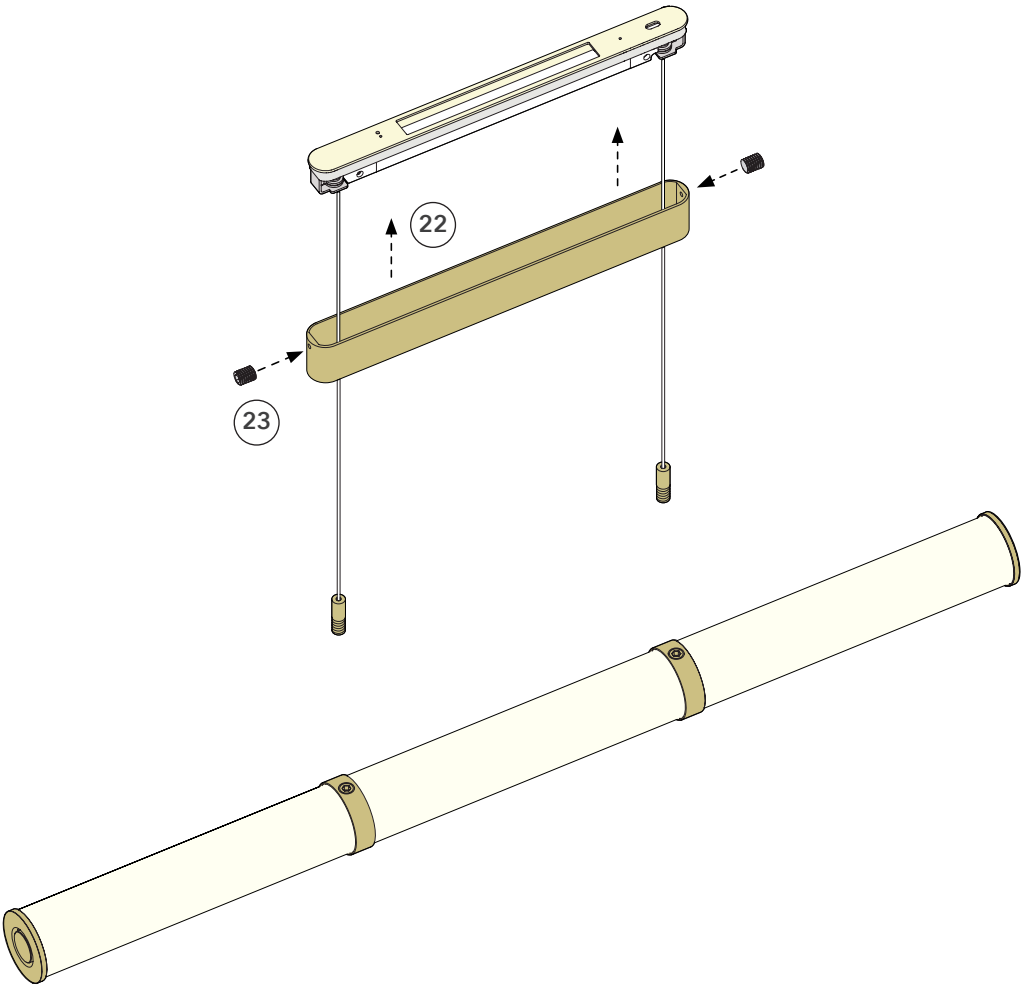

22. Slide the metal rosette cover all the way into the ceiling bracket

23. Secure the metal rosette cover with two set screws from both sides.
Use the provided Allen key.

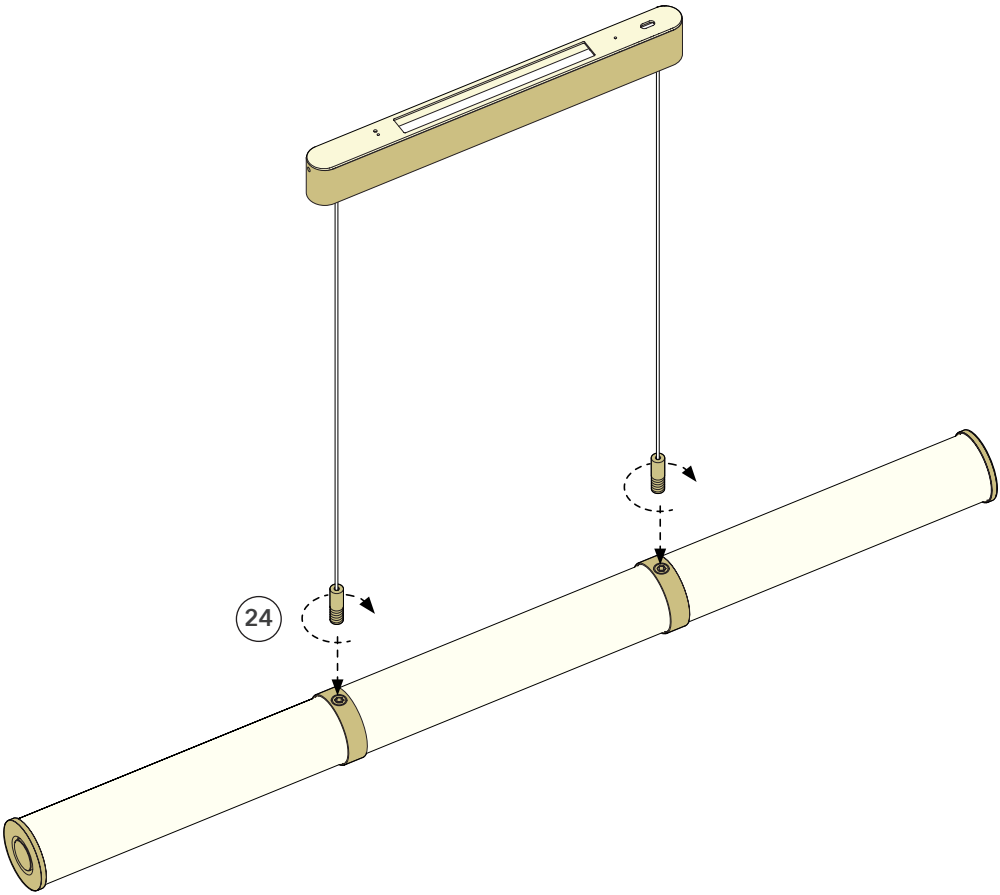

24. Reconnect both nipples with wires to the lamp.
Screw the wire nipples all the way in.
Mind the position of 24V+ and 24V-.

25. Turn the power on, test the lamp.

ANOUR

Thank you for choosing ANOUR lamp. Each piece is crafted to age with character and to quietly light your everyday rituals.

For questions, adjustments or spare parts, our team is ready to assist you at anour.dk or contact@anour.dk.