
Donya Downlight

Double and Triple

Installation Manual

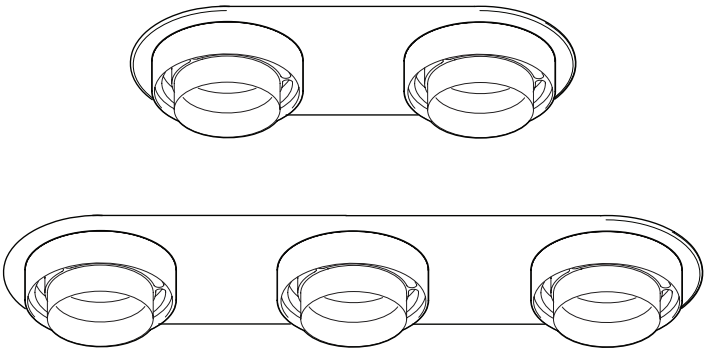

ANOUR

ANOUR - Valhøjs Allé 180, 2610 Rødovre - Denmark - Corp.reg.no.: DK 44167999
Phone: +45 33 60 70 70 - Mail: contact@anour.dk - Web: www.anour.dk

ANOUR

DONYA DOWNLIGHT
DOUBLE AND TRIPLE

Installation manual

Please read these instructions before installation and save them for future reference.


Unpack the rosette upon receiving it; prolonged storage in the original packaging may affect the surface finish. Our products are for indoor use only. Regularly check the cord and components for damage; if any is found, discontinue use immediately.

Always turn off the main power before starting installation. If you experience issues, please contact a certified electrician. In countries where mandatory by law, electrical installation must be carried out by a professional.

Our products feature the crossed-out wheelie bin symbol and must be recycled according to local environmental regulations, not disposed of with regular household waste.

For questions, please contact us at contact@anour.dk. (2026)

PARTS: (INCLUDED IN THE PACKAGE)




x1
Lamp



x1
Pair of gloves

COMPLIANCE AND CERTIFICATIONS


IP54




TECHNICAL SPECIFICATIONS

System Power: 8 W
Operating Current: 200 mA (Constant Current)
Forward Voltage: 36 V DC
Color Temperature (CCT): 2700 K
Beam Angle: 36°
Color Rendering Index: Ra ≥ 95 (CRI)
IP Rating: IP54

Downlight Double

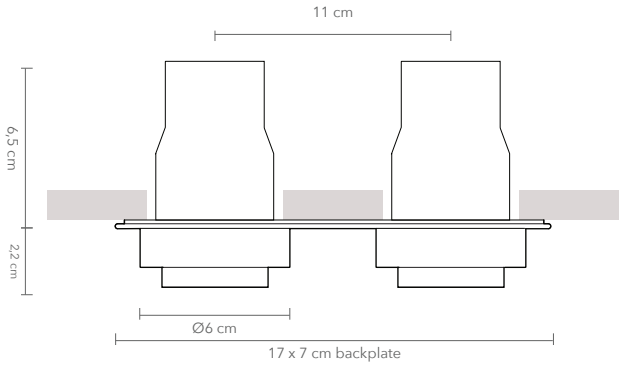



Downlight Triple

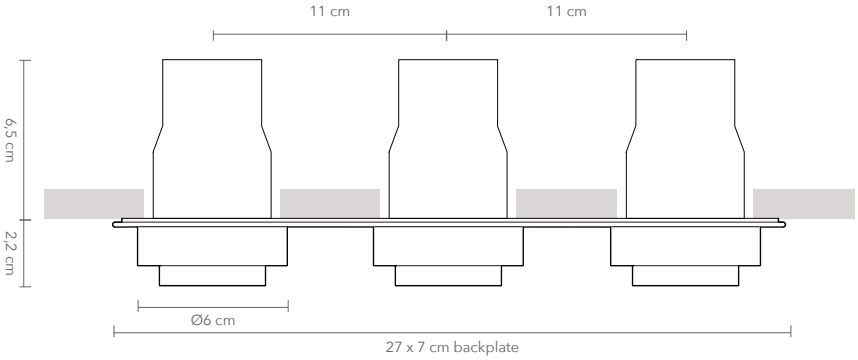


General dimensions

RECOMMENDED CUT-OUT

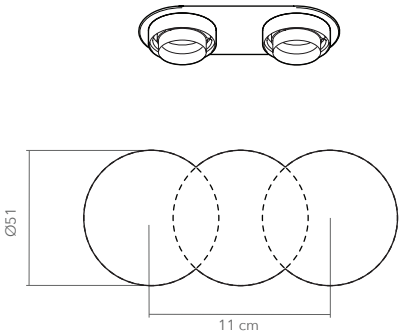

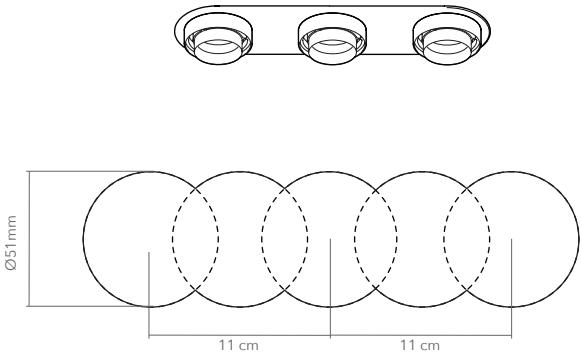


Install only in well-ventilated, non-enclosed ceiling cavities without thermal insulation. Maintain a minimum distance of 0.5 m from illuminated surfaces.

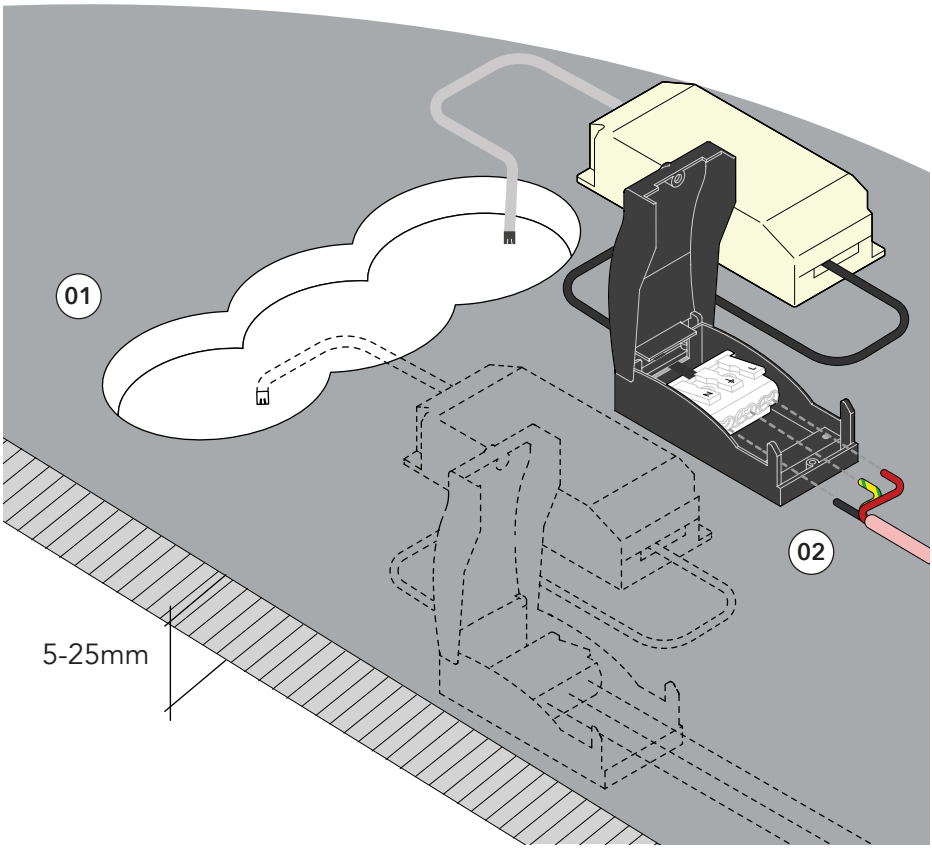

Turn off the main power. Always handle the fixture with attached gloves to prevent patination and damage.

1. Drill a 2-3x 51 mm cut-out hole. Depending on the version of your downlight. Look at page 4, for recommended cut out. Keep insulation away from the fitting/driver area.

2. Connect the LED driver to the ceiling wiring–Live (L), Neutral (N), and Ground. Ensure all connections are secure, following all local electrical codes. Repeat this proces 2-3x.

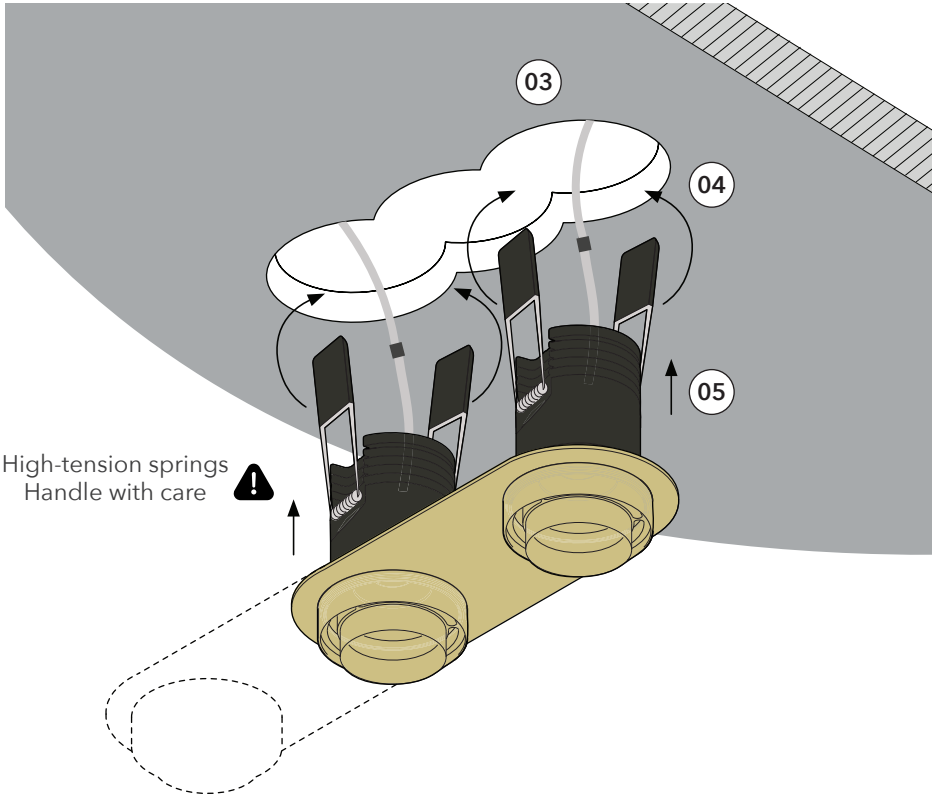

3. Connect the light source cable.

4. Compress the springs by hand upward. Handle with care as there is a lot of tension on the springs.

5. Carefully guide the fixture into the ceiling hole, leading with the compressed springs.

Push the fixture upward until flush with the ceiling; the clips will automatically snap down above the ceiling material.

ANOUR

Thank you for choosing ANOUR lamp. Each piece is crafted to age with character and to quietly light your everyday rituals.

For questions, adjustments or spare parts, our team is ready to assist you at anour.dk or contact@anour.dk.